




- With new ASIC for maximum switching accuracy
- Mountable from the top
- For all common used T-slot cylinder
- Plastic housing with nickel silver bushing and hexagon socket/slotted screw
- Enclosure rating IP 68, IP 69K
- ATEX 3D / 3G



Dimensional drawing

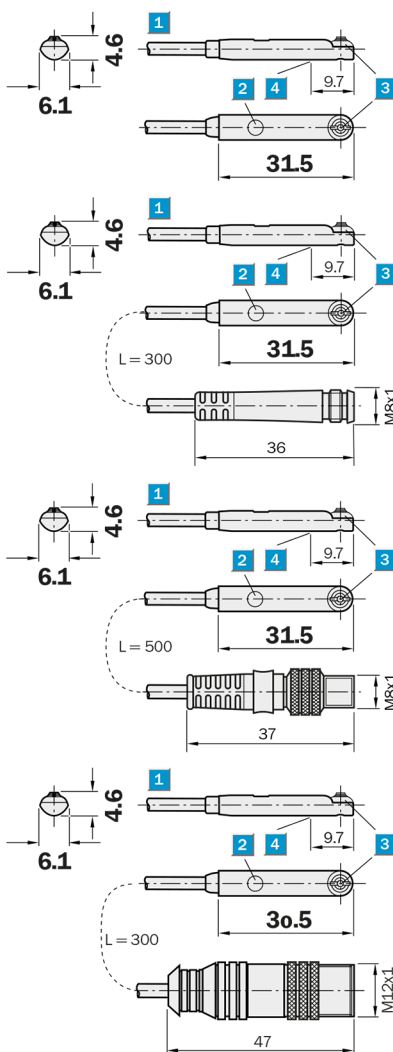

- 1 Connection
- 2 Display LED
- 3 Mounting screw
- 4 Position sensor element

Connection type

MZT6-03VPS-KP0	MZT6-03VPS-KR0	MZT6-03VPO-KWD	MZT6-03VPS-KQ0
MZT6-03VPS-KPX		MZT6-03VPS-KWD	MZT6-03VPS-KQX
		MZT6-03VPS-KW0	
		MZT6-03VPS-KWX	



M8, 3-pin







M8, 3-pin, w/ kn. scr.



3 x 0.14 mm²



M12, 3-pin



See chapter Accessories

Connector, M12, 4-pin

Connector, M8, 3-pin

Mounting systems