

MS-313R-3



MS-313R-3

World's smallest Reed Sensor
Flatpack

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	150
	VAC	120
Switching current max.	A	0.5
Carry current max.	A	0.7
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	400
Insulation resistance min.	Ω	10 ⁹

Features
➤ Adjustable switching point
➤ Ultra miniature size
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	10 - 20
Drop out min.	AT	4
Test coil	TC -	010
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	600
Resonant frequency typ.	Hz	12000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.1

Environmental Characteristics		
Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	10
Shock (1/2 sin 11 ms)	g	50

Ordering Information	
Packing Unit	50 pcs
Weight per piece	3.4 g
Weight per package	185 g
Standard AT Ranges	
1	= 10 to 15 AT
2	= 15 to 20 AT

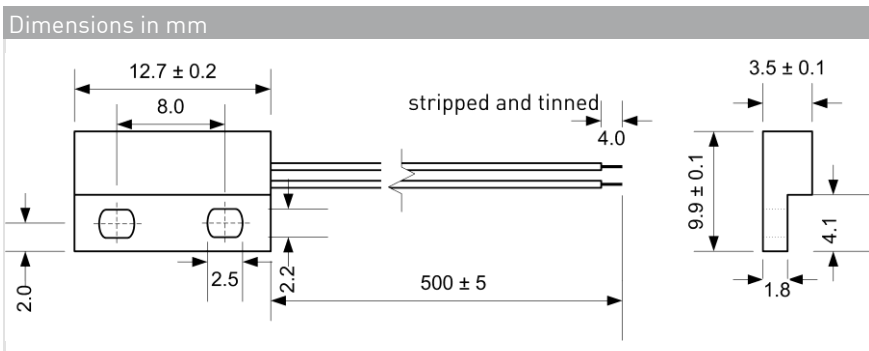

Ordering Example	
MS-313R-3-1-0500	describes MS-313R with 10-15 AT

Remarks
When mounted onto ferromagnetic parts switching distance of MS-313R-3 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Material Information		
	Material	Colour
Housing	ABS	black
Potting compound	Epoxy	black
Cable	UL 1007/1569, AWG 26, 4 mm stripped and tinned	black

© PIC GmbH