


Dimensions, Ordering Information

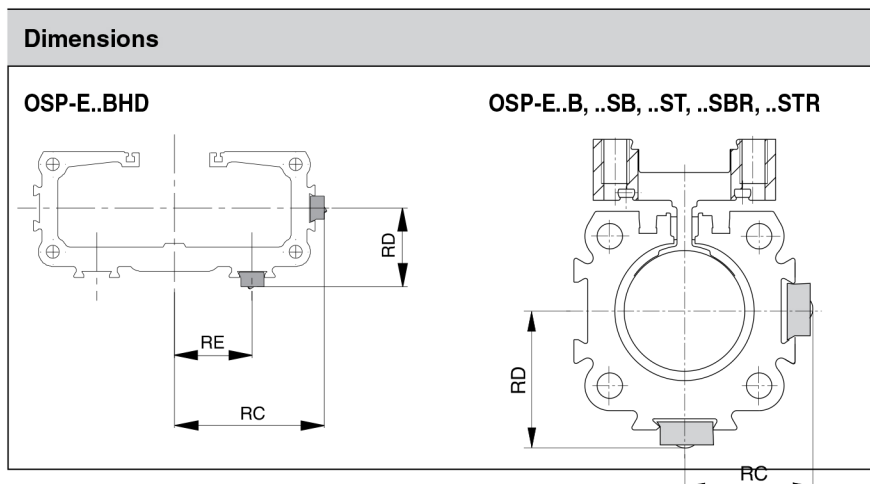

Dimension Table (mm)							
Series	Dimension						
	RC	RD	RE	MA	MB	MC	MD
OSP-E20BHD	41.5	26.6	23	-	-	-	-
OSP-E25BHD	51	27	26	-	-	-	-
OSP-E32BHD	63	34	32	-	-	-	-
OSP-E50BHD	87	48	34	-	-	-	-
OSP-E20BV	-	-	-	46	23.7	42.3	35
OSP-E25BV	-	-	-	56	26	51	35
OSP-E25*	25	27	-	-	-	-	-
OSP-E32*	31	34	-	-	-	-	-
OSP-E50*	43	48	-	-	-	-	-

\* = ..B, ..SB, ..ST, ..SBR, ..STR

Order Instructions

Description	Function	Series	Cable Length [mm]	Type	Order No.
Magnetic switches, Reed contact, with M8-Connector PIN 3 neutral (ES-S compatible connector)	NC	all*	100	RS-S	KL3087
	NO	all*	100	RS-S	KL3047
Magnetic switches, Reed contact, with cable	NC	all*	5000	RS-K	KL3048
	NO	all*	5000	RS-K	KL3045
	NC	OSP-E..STR	5000	RS-K	KL3096
Magnetic switches, electrical with M8-connector	NPN (NO)	all*	100	ES-S	KL 3060
	PNP (NC)	all*	100	ES-S	KL 3054
	PNP (NC)	OSP-E..STR	100	ES-S	KL 3098
Magnetic switch set **	NC	OSP-E..BV	2 x 100	RS-S	15886
Connecting cable					
suitable for cable chain			5000		KL3186
suitable for cable chain			10000		KL3217
suitable for cable chain			15000		KL3216
standard			5000		4041
standard			10000		KL9074

\* = except for OSP-E..STR

\*\* = consisting of 2 magnetic switches KL 3087, 1 fastening rail, 2 magnets