

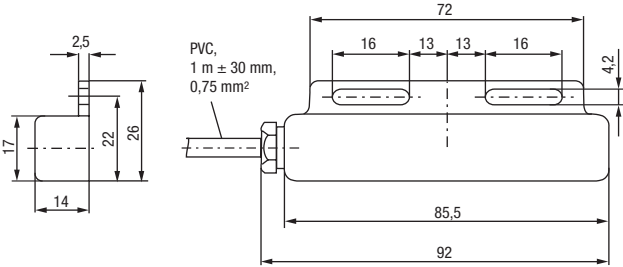


Flachschalter Surface mount switches Interrupteurs plats

104 ...



105 ...

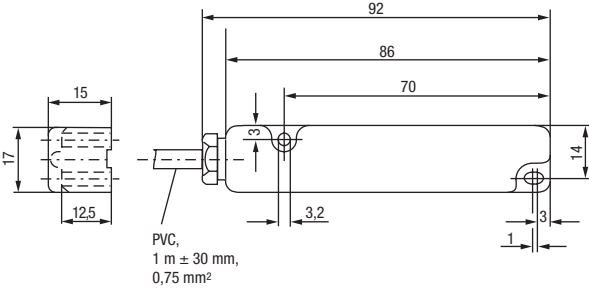

Typen Nr. type no. référence	Schaltspannung switching voltage tension de commutation	Schaltstrom switching current courant de commutation	Schaltleistung switching power pouvoir de coupure	Kontaktform* contact form* type de contact*
104 410	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	A
104 420	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	B
104 430	max. 230 V	max. 1,0 A	max. 60 W / 60 VA	C
104 440	max. 250 V	max. 1,3 A	max. 60 W / 80 VA	A/B-bi
104 450	max. 230 V	max. 0,8 A	max. 40 W / 60 VA	C-bi
105 410	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	A
105 420	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	B
105 430	max. 230 V	max. 1,0 A	max. 60 W / 60 VA	C
105 440	max. 250 V	max. 1,3 A	max. 60 W / 80 VA	A/B-bi
105 450	max. 230 V	max. 0,8 A	max. 40 W / 60 VA	C-bi

Typen Nr. type no. référence	Schutzart protection class protection	Temperaturbereich temperature range plage de température	Material material matériaux
104 4.0	IP 67	-25...+75°C	PA
105 4.0			

* A = Schließer, B = Öffner, C = Wechsler, A/B-bi = bistabiler Schließer/Öffner, C-bi = bistabiler Wechsler
A = N.O., B = N.C., C = C.O., A/B-bi = bistable N.O. / N.O., C-bi = bistable C.O.
A = NO, B = NF, C = inverseur, A/B-bi = NO/NF bistable, C-bi = inverseur bistable