

Features

- 1A,1B,1C/ 2A,2B,2C configurations
- Strength between coil and contact is 5kv
- With AC Voltage input
- LED available
- With matched socket




JQX-14FC 1Z



JQX-14FC 2Z

PCB Relay

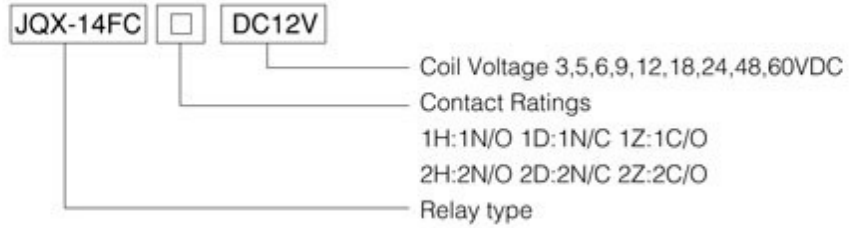

Contact Ratings

Contact Ratings	1H,1Z	2H,2Z
Contact Resistance	50mΩ(1A 6VDC)	
Contact Material	Silver Alloy	
Contact capacity	10A 220VAC/30VDC	5A 220VAC/30VDC
	TV-5	

Specification

Insulation Resistance	1000MΩ.500VDC
Dielectric Strength	BCC 5000V 1 min
	BOC 1000V 1 min
Operate Time	15ms/5ms
Terminal Type	PCB


Coil Ratings

Nominal Coil Power	0.55W
--------------------	-------

Coil Versions

Nominal Voltage VDC	Pull-in VoltageVDC	Release VoltageVDC	Coil Resistance Ω: ±10%
3	2.25	0.3	20
5	3.75	0.5	50
6	4.50	0.6	68
9	6.75	0.9	160
12	9.00	1.2	270
18	13.5	1.5	650
24	18.0	2.4	1080
48	36.0	4.8	4340
60	45.0	6.0	7000

Dimension.Bottom View

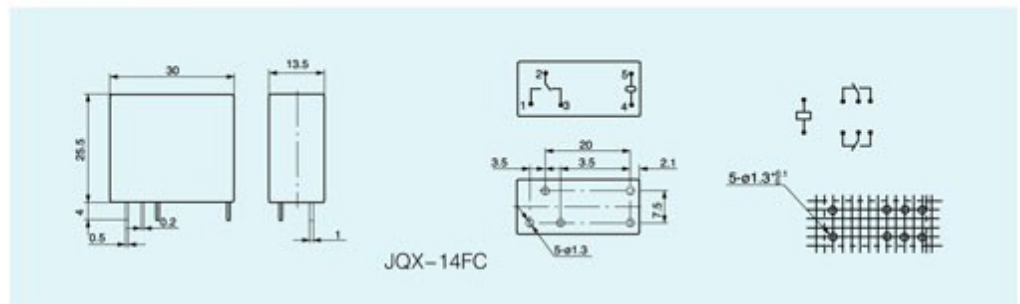

Reference Data

