

MS-217-5



MS-217-5

Mains switching Reed Sensor

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	260
Switching current max.	A	0.3
Carry current max.	A	1.4
Breakdown voltage min.	VDC	400
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ¹⁰

Features
➤ Mains switch inside
➤ Replaces various competitors types
➤ Various sensitivity ranges available
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	15 - 30
Drop out min.	AT	4
Test coil	TC -	200
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	400
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	0.6
Release time max.	ms	0.2

Environmental Characteristics		
Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	100

© PIC GmbH

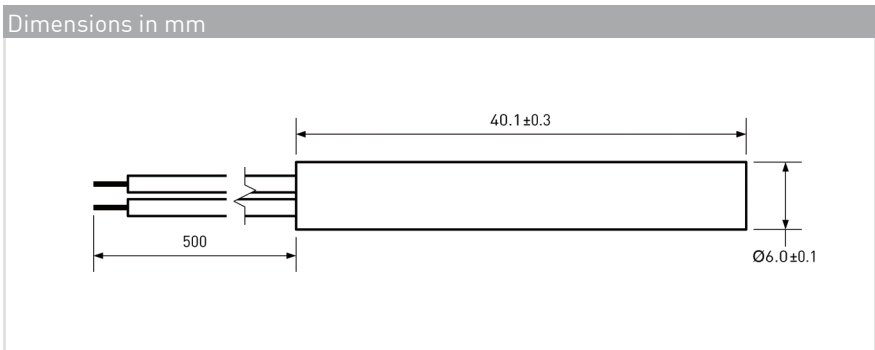

Ordering Information	
Packing Unit	50 pcs
Weight per piece	5.4 g
Weight per package	280 g
Standard AT Ranges	
	2= 15 to 20 AT
	3= 20 to 25 AT
	4= 25 to 30 AT
Ordering Example	
MS-217-5-2 describes MS-217-5 with 15 to 20 AT.	

MS-217-5



MS-217-5
Mains switching Reed Sensor

Material Information		
	Material	Colour
Housing	ABS	black
Cable	UL 1007/1569, AWG 24, 4 mm stripped and tinned	black
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

Test Coil placed in vertical position

Reed Sensor aligns with bottom line

Reed Sensor centered in Test Coil

Test Parameters	
Test coil	TC-093
Test programs	
AT range	Test program
2 =	MS-217-5-2
3 =	MS-217-5-3
4 =	MS-217-5-4

Remarks

When mounted onto ferromagnetic parts switching distance of MS-217-5 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.