



SEMIPACK® 5

Thyristor / Diode Modules

SKKT 460

SKKH 460

Features

- Heat transfer through aluminium nitride ceramic insulated metal baseplate
- Precious metal pressure contacts for high reliability
- UL recognized, file no. E63532


Typical Applications*

- AC motor softstarters
- Input converters for AC inverter drives
- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical, processes)
- Professionals light dimming (studios, theaters)

¹⁾ see assembly instructions

V_{RSM}	V_{RRM}, V_{DRM}	$I_{TRMS} = 800 \text{ A}$ (maximum value for continuous operation)		
V	V	$I_{TAV} = 460 \text{ A}$ (sin. 180; $T_c = 85^\circ\text{C}$)		
1700	1600	SKKT 460/16E	SKKH 460/16E	
2300	2200	SKKT 460/22E H4	SKKH 460/22E H4	

Symbol	Conditions	Values	Units
I_{TAV}	$\sin. 180; T_c = 85 \text{ (100)}^\circ\text{C};$	460 (335)	A
I_{TSM}	$T_{vj} = 25^\circ\text{C}; 10 \text{ ms}$ $T_{vj} = 130^\circ\text{C}; 10 \text{ ms}$	18000	A
i^2t	$T_{vj} = 25^\circ\text{C}; 8,3 \dots 10 \text{ ms}$ $T_{vj} = 130^\circ\text{C}; 8,3 \dots 10 \text{ ms}$	15500 1620000 1200000	A ² s A ² s
V_T	$T_{vj} = 25^\circ\text{C}; I_T = 1400 \text{ A}$	max. 1,6	V
$V_{T(TO)}$	$T_{vj} = 130^\circ\text{C}$	max. 0,88	V
r_T	$T_{vj} = 130^\circ\text{C}$	max. 0,45	mΩ
$I_{DD}; I_{RD}$	$T_{vj} = 130^\circ\text{C}; V_{RD} = V_{RRM}; V_{DD} = V_{DRM}$	max. 240	mA
t_{gd}	$T_{vj} = 25^\circ\text{C}; I_G = 1 \text{ A}; di_G/dt = 1 \text{ A}/\mu\text{s}$	1	μs
t_{gr}	$V_D = 0,67 * V_{DRM}$	2	μs
$(di/dt)_{cr}$	$T_{vj} = 130^\circ\text{C}$	max. 250	A/μs
$(dv/dt)_{cr}$	$T_{vj} = 130^\circ\text{C}$	max. 1000	V/μs
t_q	$T_{vj} = 130^\circ\text{C},$ $T_{vj} = 25^\circ\text{C}; \text{typ. / max.}$	100 .. 200 150 / 500	μs mA
I_H	$T_{vj} = 25^\circ\text{C}; R_G = 33 \Omega; \text{typ. / max.}$	300 / 2000	mA
I_L	$T_{vj} = 25^\circ\text{C}; d.c.$	min. 3	V
V_{GT}	$T_{vj} = 25^\circ\text{C}; d.c.$	min. 200	mA
I_{GT}	$T_{vj} = 25^\circ\text{C}; d.c.$	max. 0,25	V
V_{GD}	$T_{vj} = 130^\circ\text{C}; d.c.$	max. 10	mA
I_{GD}	$T_{vj} = 130^\circ\text{C}; d.c.$		
$R_{th(j-c)}$	cont.; per thyristor / per module	0,072 / 0,035	K/W
$R_{th(j-c)}$	sin. 180°; per thyristor / per module	0,074 / 0,037	K/W
$R_{th(j-c)}$	rec. 120°; per thyristor / per module	0,078 / 0,039	K/W
$R_{th(c-s)}$	per thyristor / per module	0,02 / 0,01	K/W
T_{vj}		- 40 ... + 130	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a.c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
V_{isol}	a.c. 50 Hz; r.m.s.; 1 s / 1 min. for SKK...H4	4800 / 4000	V~
M_s	to heatsink	5 ± 15% ¹⁾	Nm
M_t	to terminals	12 ± 15%	Nm
a		5 * 9,81	m/s ²
m	approx.	1400	g
Case	SKKT SKKH	A 60b A 66b	



SKKT

SKKH

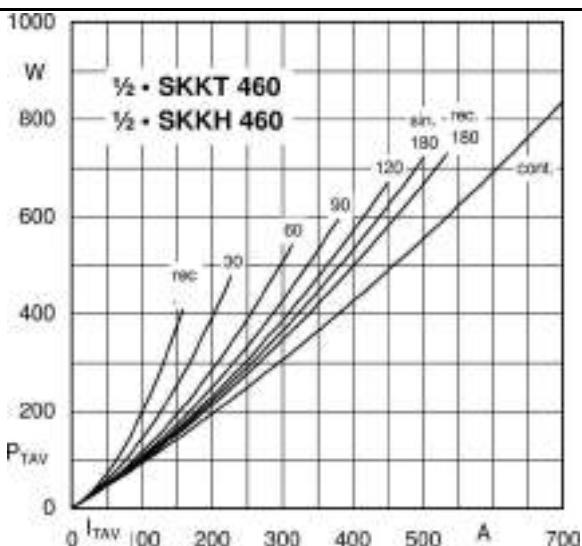


Fig. 1I Power dissipation per thyristor vs. on-state current

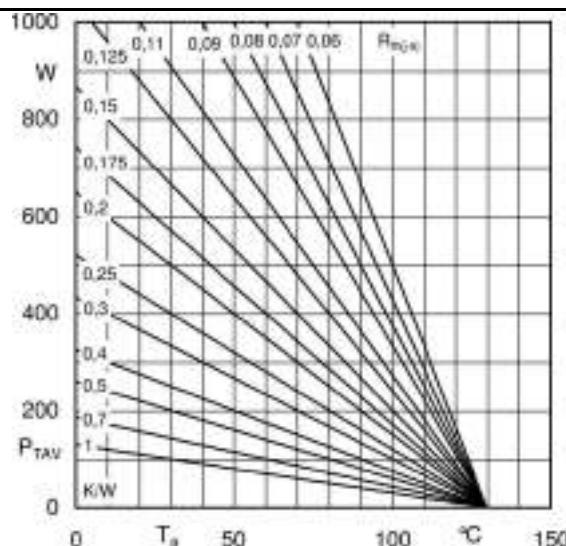


Fig. 1r Power dissipation per thyristor vs. ambient temperature

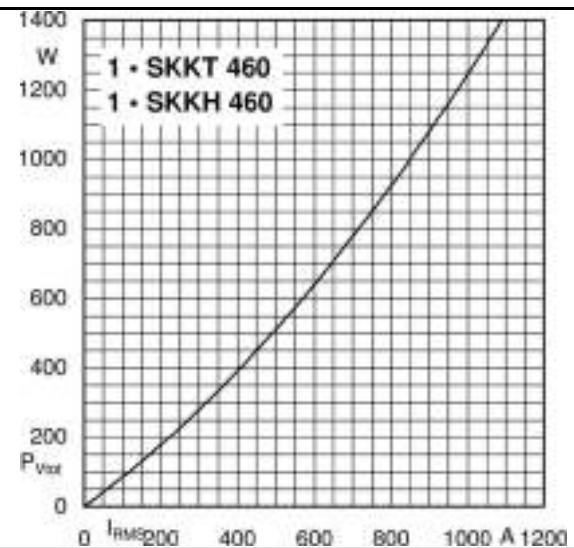


Fig. 2I Power dissipation per module vs. rms current

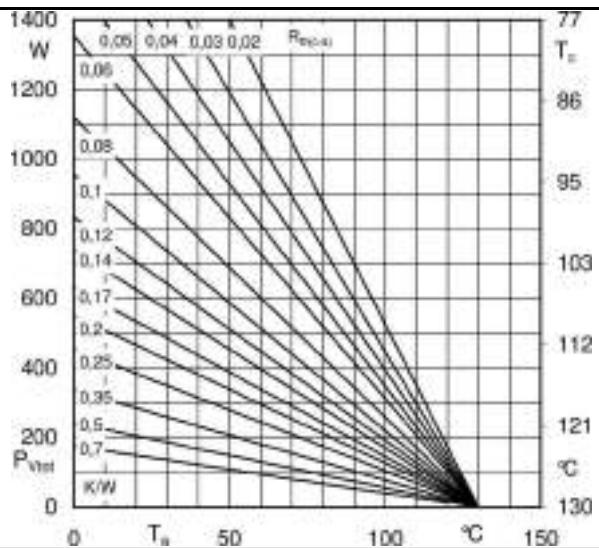


Fig. 2R Power dissipation per modules vs. case temp.

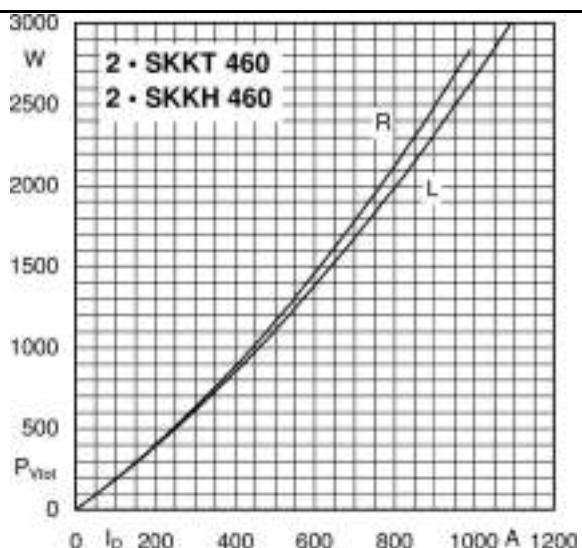


Fig. 3L Power dissipation of two modules vs. direct current

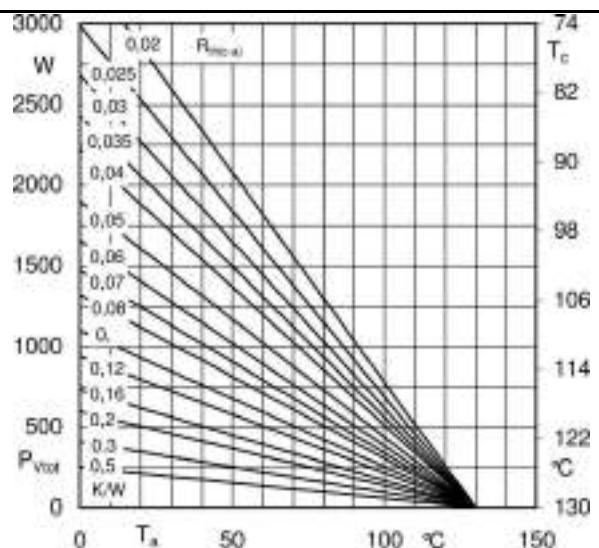


Fig. 3R Power dissipation of two modules vs. case temp.

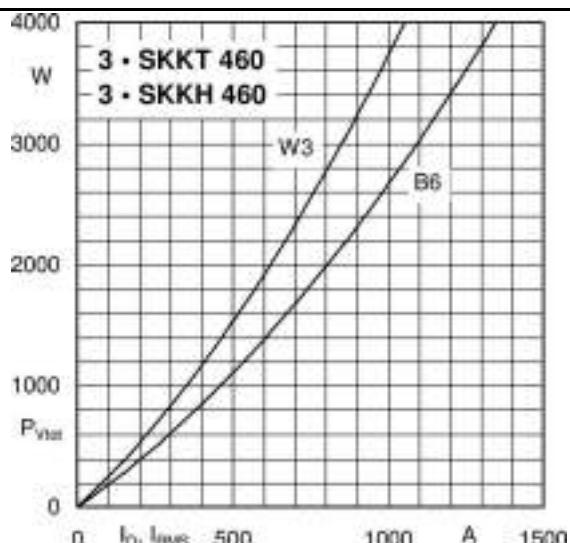


Fig. 4L Power dissipation of three modules vs. direct and rms current

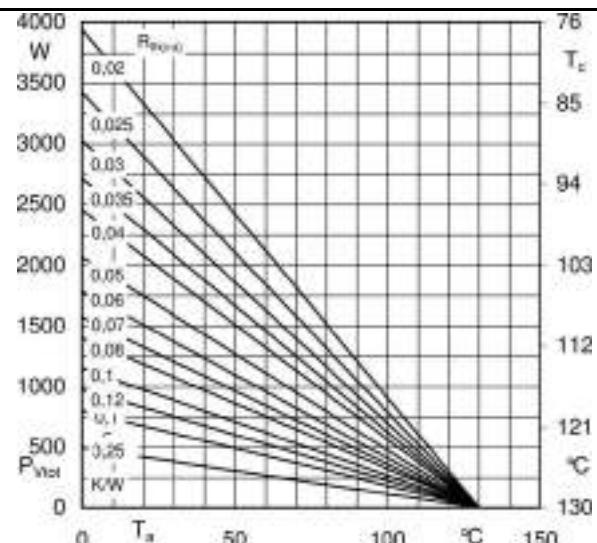


Fig. 4R Power dissipation of three modules vs. case temp.

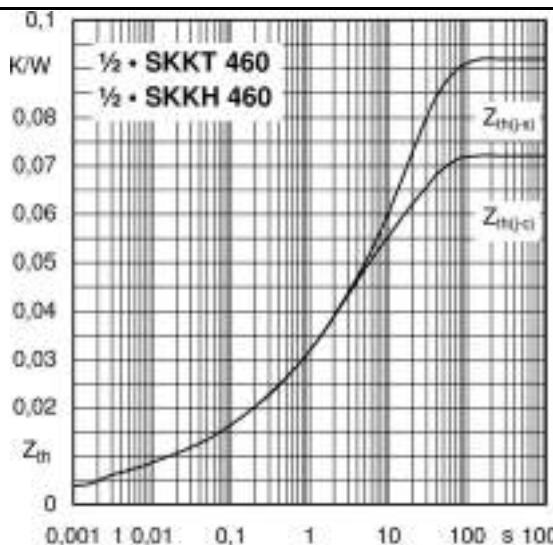


Fig. 6 Transient thermal impedance vs. time

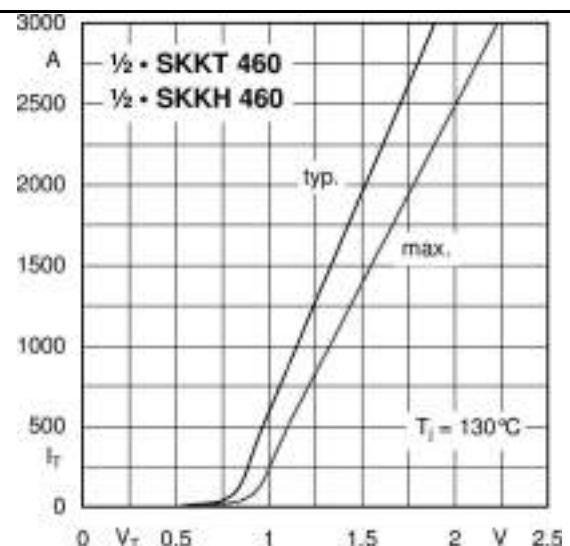


Fig. 7 On-state characteristics




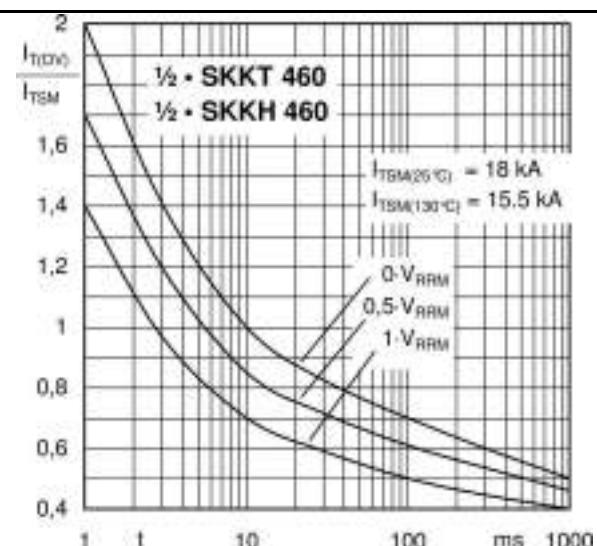


Fig. 8 Surge overload current vs. time

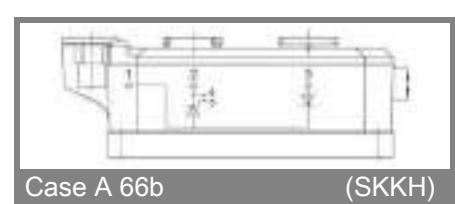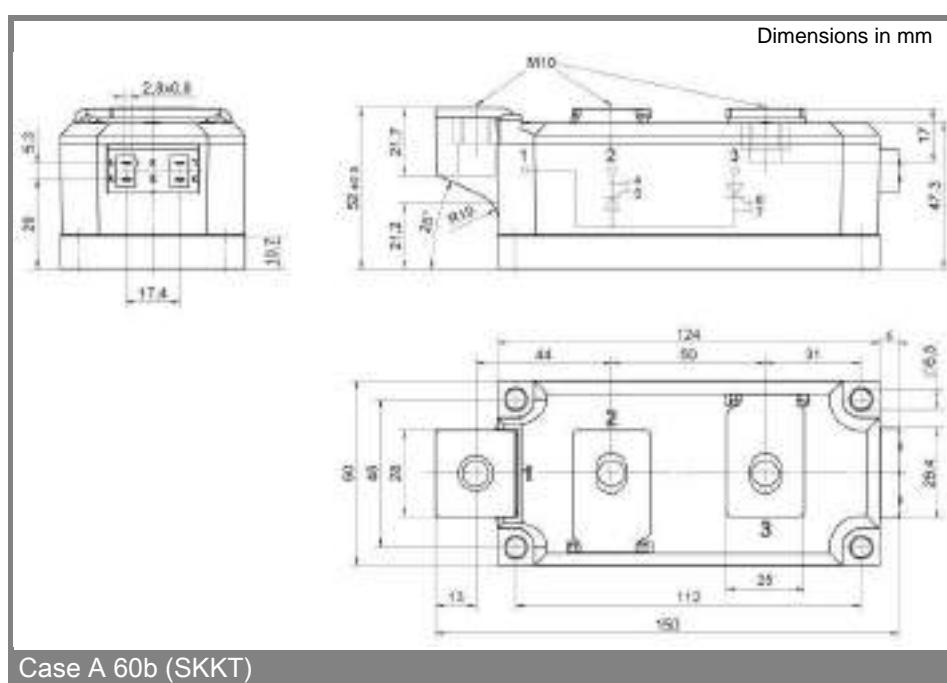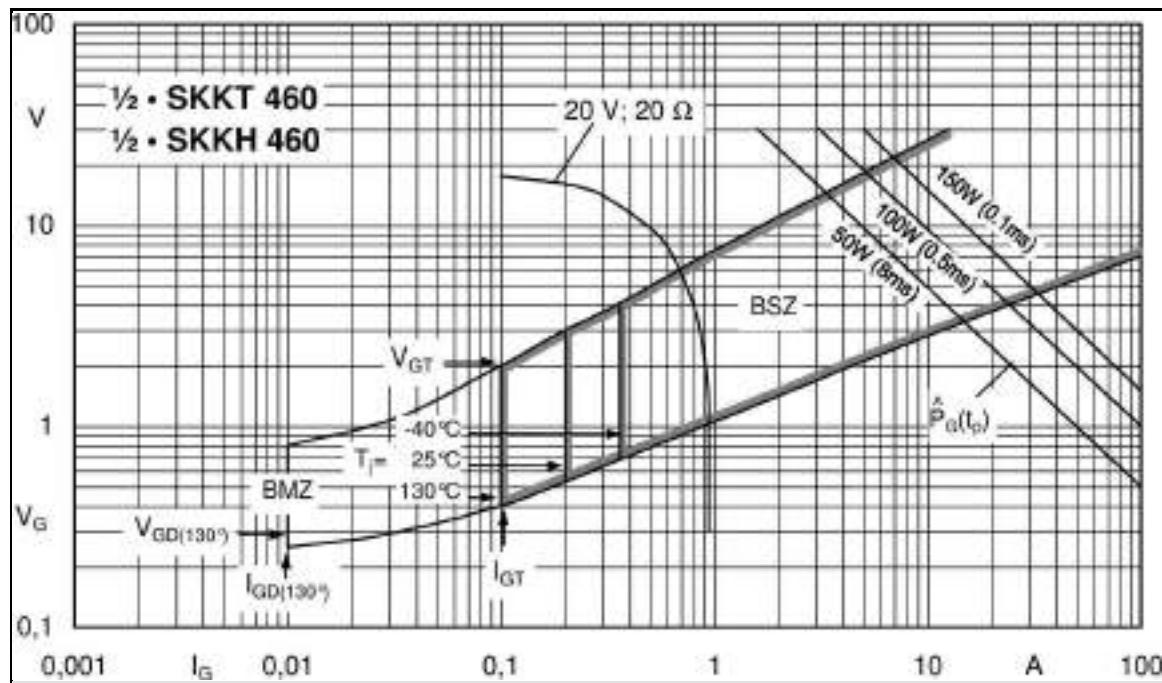

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.