

Perfect fit for standard environments

- Embody two seemingly contradictory characteristics: value-for-money and high reliability
- All 372 Models
- Four different sizes: M8, M12, M18 and M30
- Single and double sensing distances, Shielded and unshielded
- A choice of short and long bodies, two connecting methods and four output types
- Operating temperature: -25°C to 70°C
- Water resistance: IP67
- With an all-round 360° visible indicator



Refer to Safety Precautions on page 20.

Features

Wide Variation

"Double Distance" Close at Hand

Perfect Fit to Your Application Needs

With no less than 372 models in the family.

You can choose the one that exactly meets your needs.

E2B series can save cost & your time via single source.

All
372
Models

Output configuration:
PNP/NPN

Operation mode:
NO/NC

Short/
Long Bodies

Long body for easy
adjustment after mounting

Shielded/
Unshielded



Pre-wired/
Connectors


Shielded models for
better noise immunity

Connectors for easy maintenance

Wide range of size
Lineup of models from
M8 to M30

Sensing distance

Models available with standard distance (x1) and double distance (x2)

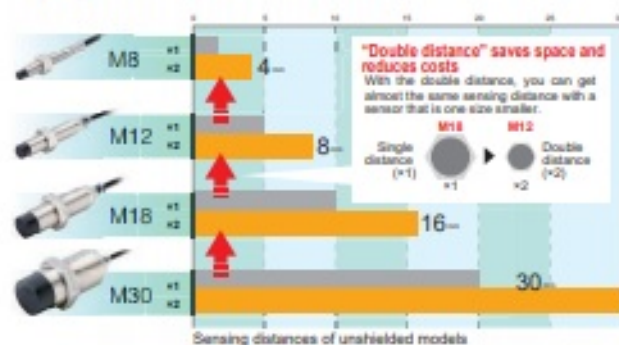

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Reliable Performance

360-degree indication

Easy visibility for 360° even in dark locations so you can mount the sensor in any direction.

* The 360-degree indication is only for Pre-wired Models of M12, M18, and M30.

* The other models (Pre-wired Models of M8 and all the Connector Models) have 4 LEDs at 90-degree intervals, which realize clear visibility from a 360-degree angle.






Oil-mist environment resistant!



IP67

We have performed not only a specified test for rating the degree of protection (IP67) for catalogs, but also tests with oil mist which appears onsite. Simulation tests has been performed with attachment of high concentration of oil mist.

Degree of Protection	E2B	E2E (M8/M12/M18/M30 size)	Small Dia E2E (3 dia./4 dia./6.5 dia./M4/M5)
Water resistance	IP67	IP67 IP69K *1	IP67
Oil resistance	In oil-mist of soluble cutting oil diluted, 250 hours, the temperature of atmosphere is 23°C 	Soaked in oil (soluble type and insoluble) 500 hours, temperature of oil 50°C 	Soaked in insoluble oil 250 hours, temperature of oil 50°C 

*1. There are so many kinds of E2E, not all IP69K rated. In detailed part#, please contact your OMRON representative.