
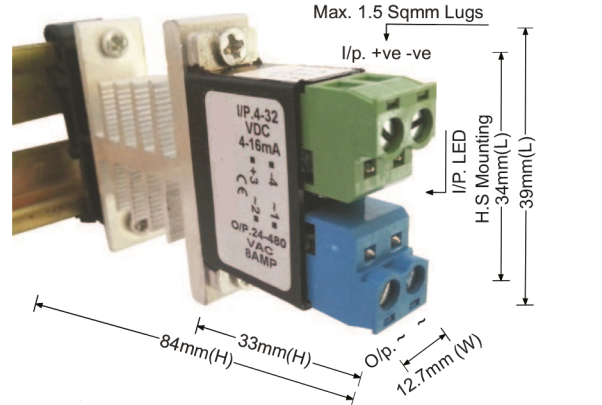


VALF KONTROL - SOLİD STATE RELAY (SSR) PLC ÇIKIŞ RÖLESİ

Biltec TYP BTC8D48T DC-AC Input:4-32VDC/ Output: 24-480 VAC

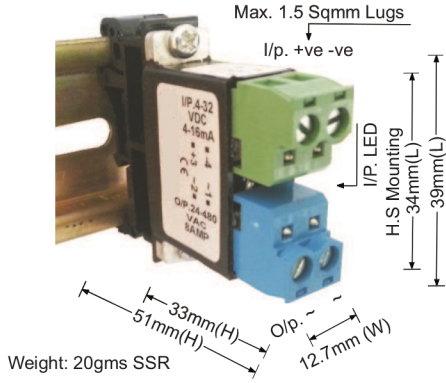

Input : 4-32VDC/4-16mA - Plug in type
Input LED Indication : Green
Output : 24-480VAC (47-63 Hz)- Plug in type
PIV : 800Vpk, I²T : 340A²S for 9.6mS
Body isolation : 3kV for 1min
I/P. to O/P. isolation : 2.5kV for 1min
Load Current : 3Amp @55 °C, Zero Cross Over SSR
No leakage current at output side
Single Phase Motor ON/OFF up to 1Hp

Input : 4-32VDC/4-16mA - Plug in type
Input LED Indication : Green
Output : 24-480VAC (47-63 Hz)- Plug in type
PIV : 800Vpk
I²T : 340A²S for 9.6mS
Body isolation : 3kV for 1min
I/P. to O/P. isolation : 2.5kV for 1min
Load Current : 7Amp @55 °C
With Heat Sink G-12.5 + Din
Zero Cross Over SSR
No leakage current at output side
Single Phase Motor ON/OFF up to 1Hp

